

OUTILS DE PROGRAMMATION

LOGICIEL

KP-H
A130009

MAINTENANCE

POL-200-TS
A130004

ALIMENTATION EXTERNE 24V

HLSPS25F A130048


HLSPS50F A130049

2040424012 A157559

AES EXTERNE 24V

H4Y-TRE
A130008

62 H4Y-TRE maximum par matériel central

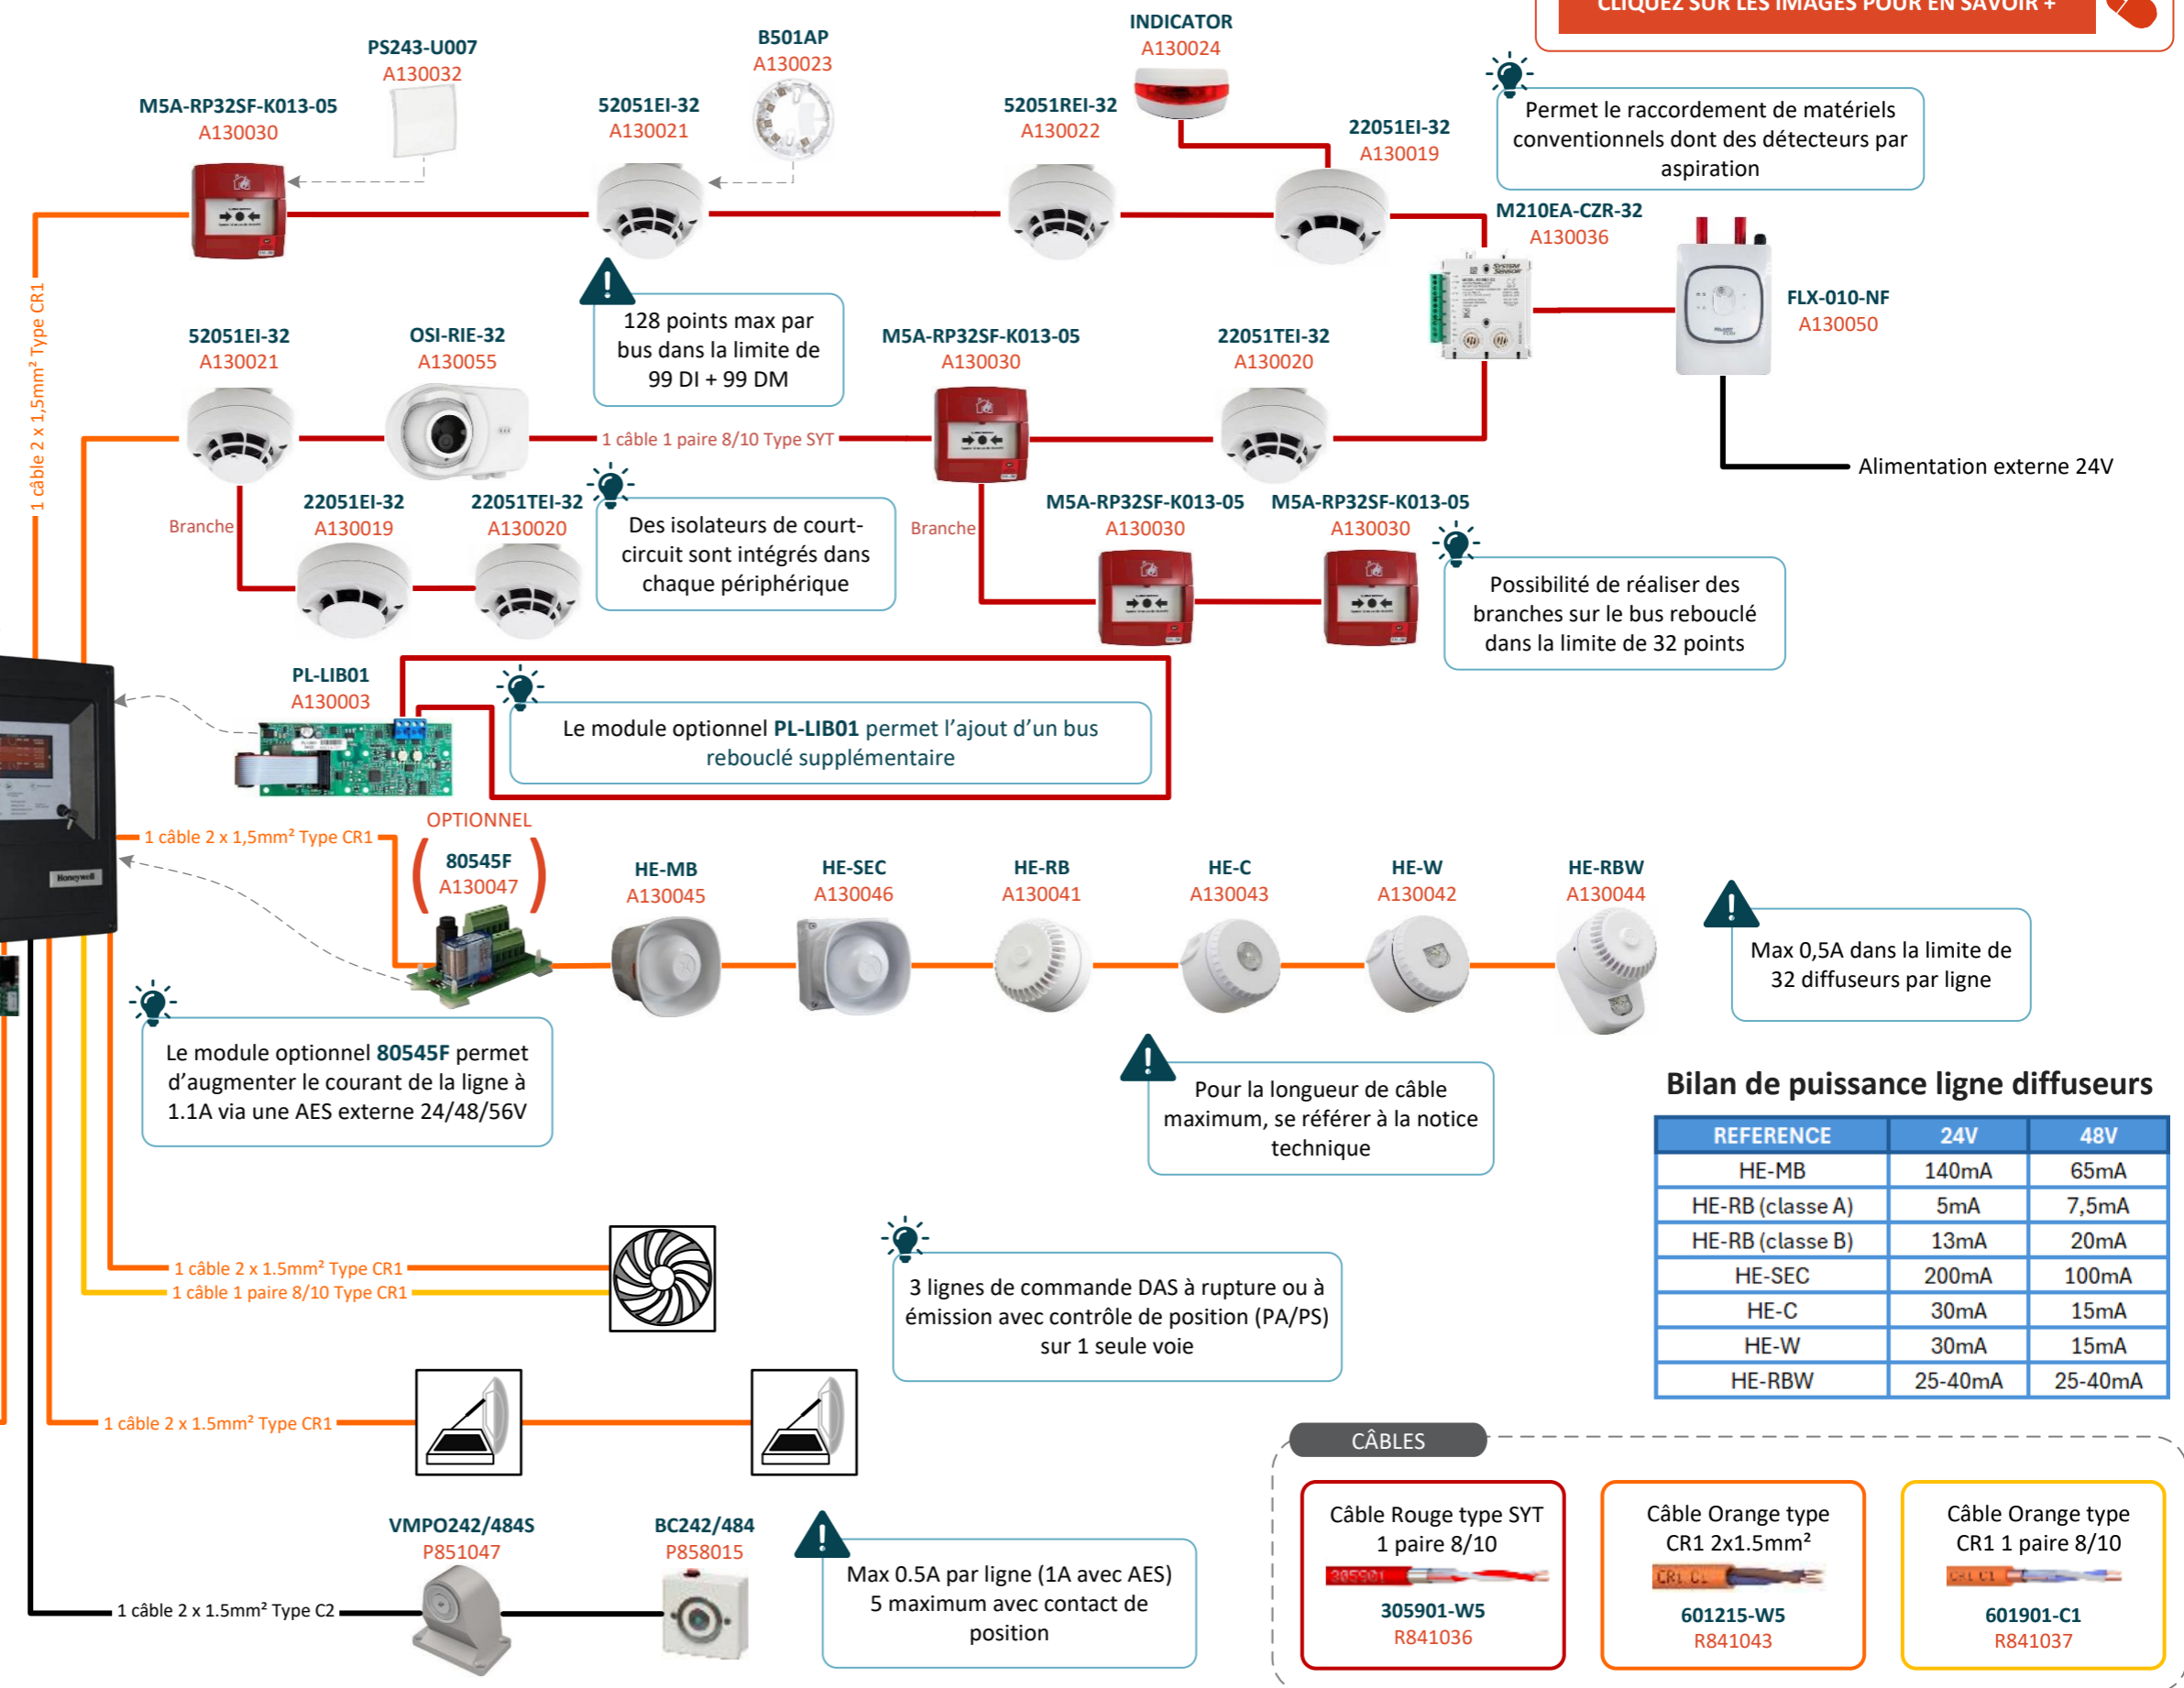

Bilan de puissance ligne diffuseurs

REFERENCE	24V	48V
HE-MB	140mA	65mA
HE-RB (classe A)	5mA	7,5mA
HE-RB (classe B)	13mA	20mA
HE-SEC	200mA	100mA
HE-C	30mA	15mA
HE-W	30mA	15mA
HE-RBW	25-40mA	25-40mA

CÂBLES

Câble Rouge type SYT 1 paire 8/10
305901-W5 R841036

Câble Orange type CR1 2x1.5mm²
601215-W5 R841043

Câble Orange type CR1 1 paire 8/10
601901-C1 R841037