

DHI-ARD323-W2(868)

Wireless door detector



- Signal strength detection.
- Low battery alarm.
- Temperature measurement.
- Frequency hopping function and two-way communication technology ensure communication stability.
- Cloud update and automatic recovery from update failure.

System Overview

Wireless door detector is a detector consisting of a sensor and a magnet that can trigger an alarm when an armed door is opened. It can display the open and close state of doors and windows on the DMSS App in real time, and provides timely notifications of alarm events when armed, acting as a monitoring mechanism

Scene

It is suitable for civil use, and other scenes with a high demand for anti-theft and anti-intrusion, such as supermarkets and shopping malls.

Technical Specification

Port

| | |
|-----------------|---------------------------|
| Indicator Light | 1 × green alarm indicator |
| Button | 1 × power button |

Function

| | |
|-------------------|---------------------------|
| Tamper Alarm | Yes |
| Remote Upgrade | Cloud update |
| Low Battery Alarm | Yes |
| Test Mode | Yes |
| Search | Signal strength detection |

Wireless

| | |
|-------------------------|----------------------------------------------|
| Carrier Frequency | 868.0 MHz–868.6 MHz |
| Communication Distance | Up to 1,300 m (4,265.09 ft) in an open space |
| Communication Mechanism | Two-way |

| | |
|-------------------|--------|
| Frequency Hopping | Yes |
| Encryption Mode | AES128 |

General

| | |
|-----------------------|-----------------------------------------------------------------|
| Power Supply | CR123A battery |
| Power Consumption | 125 mW |
| Operating Temperature | −10 °C to +55 °C (+14 °F to +131 °F) (indoor) |
| Operating Humidity | 10%–90% (RH) |
| Product Dimensions | 100.2mm × 20.8mm × 20.3mm (3.94" × 0.82" × 0.80") (L × W × H) |
| Packaging Dimensions | 135.0 mm × 98.5 mm × 27.8mm (5.31" × 3.88" × 1.09") (L × W × H) |
| Installation | Bracket mount |
| Net Weight | 70 g (0.15 lb) |
| Gross Weight | 115 g (0.25 lb) |
| Certifications | CE |
| Battery Life | 5 years |
| Casing Material | PC + ABS |

Temperature

| | |
|---------------------|-------------------------------------------------|
| Measuring Range | −15 °C to +65 °C (+18.8 °F to +149 °F) (indoor) |
| Measuring Precision | ± 1 °C (± 33.8 °F) |
| Resolution | 1 °C (33.8 °F) |


Specification

| | |
|--------|-------------|
| Sensor | Reed Switch |
|--------|-------------|


| | |
|-------------------|----------------------------------|
| Scenario | Non-metal doors |
| Movement Distance | < 40 mm (1.57") |
| Peripherals | |
| External Zone | 1-channel external digital input |

| Ordering Information | | |
|------------------------|--------------------|------------------------|
| Type | Part Number | Description |
| Wireless door detector | DHI-ARD323-W2(868) | Wireless door detector |

Installation

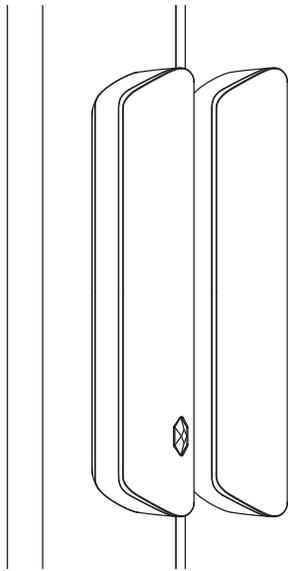

Dimensions (mm[inch])

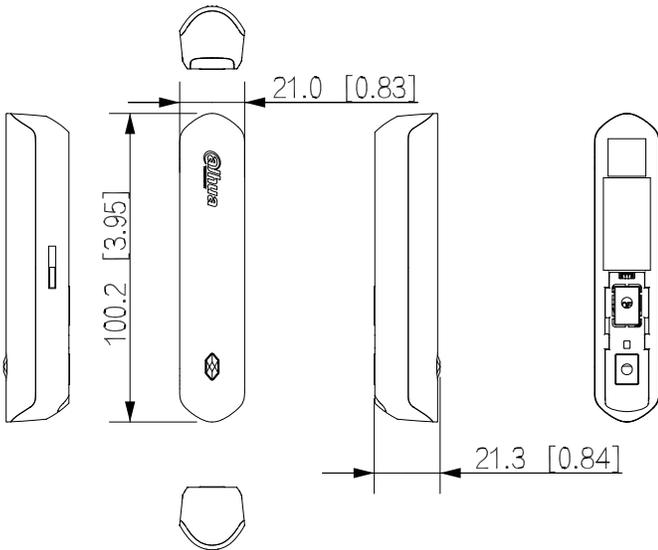

Application

