


# BLOCTECH S


ESH




Dimensions [mm]  
Dimensions [mm]

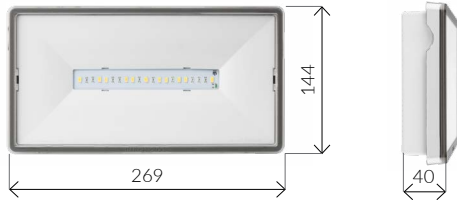

pictogramme universel inclus  
universal pictogram included




Accessoires  
Accessories




Drapeau ONTEC S  
ONTEC S diffuser



option montage encastré  
en utilisant le kit  
option with recessed mount  
kit applied



option montage a 30°  
mounting option with 30°  
bracket applied

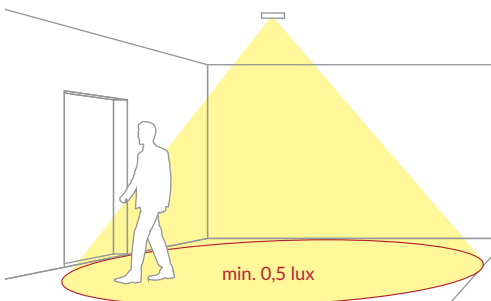

Eclairage Bi-fonction BAES/BAEH (IP65 / IP44)  
Bi-function BAES/BAEH emergency lighting (IP64 / IP44)

**Model**



<b>BLOCTECH S ESH 15 025 TC</b>	1 h + 5 h	2 x LiFePO4 3.2 V 1.5 AAh
<b>BLOCTECH S ESH 15 025 D2</b>	1 h + 5 h	2 x LiFePO4 3.2 V 1.5 AAh

**Principales spécifications techniques**

Technical parameters

Application Application	Eclairage Bi-fonction BAES/BAEH Bi-function BAES/BAEH emergency lighting
Source lumineuse Light source	<b>4 LED + 2 LED</b>
Autonomie de la batterie Battery operating time	1 h + 5 h
Mode Mode	<b>NM</b>
Flux lumineux Luminous flux	143 lm (1 h) / 8 lm (5 h)
Test Testing	D2: DATA/Supervision controle TC: Performance SATI
Alimentation électrique Power supply	210÷250 V AC 50÷60Hz;
Indice de protection Protection degree	IP65 / IP44
Indice Impacts mécaniques externes Protection against mechanical impacts	IK08
Classe d'isolation Insulation class	II
Températures de fonctionnement Temperature range	t <sub>s</sub> +10 °C ÷ +40 °C
Couleurs Colour	☐ RAL 9003 ■ RAL gray or black

**Photometrie**  
Photometry

[m]	H	A	B
2,5	3,2	8,0	
3,0	3,5	8,6	
4,0	3,6	9,7	
5,0	3,7	10,5	
6,0	3,6	11,2	
7,0	3,4	11,5	
8,0	2,4	11,7	
9,0	1,8	11,6	
10,0	-	-	

270,5 x 40,5 x 150  
800 mm 1200 mm  
700 szt. / pcs

