

## DS-KH6320EY-WTE2

### Video Intercom Network Indoor Station



- UI V2.0: Easy Configuration & User friendly design
- 7-inch colorful touch screen with resolution 1024 × 600
- Standard PoE
- Stores messages and capture pictures in the TF card
- Remote unlocking via the client software or the mobile client
- Views live videos of door stations and linked cameras


## ▪ Specification

System parameters	
Operating system	Embedded Linux operation system
ROM	32 MB
RAM	128 MB
CPU	Embedded processor
Display parameters	
Screen size	7-inch
Operation method	Capacitive touch screen
Type	Colorful TFT screen
Resolution	1024 × 600
Video parameters	
Lens	/
FOV	/
WDR	/
Resolution	/
Focal length	/
Audio parameters	
Audio input	Built-in omnidirectional microphone
Audio compression standard	G.711 U G.711 A
Audio output	Buit-in loudspeaker
Audio compression bitrate	64 Kps
Audio quality	Noise suppression and echo cancellation
Volume adjustment	Adjustable
Capacity	
Event capacity	200 captured pictures (with TF card); 200 alarm records 2 MB RAM (without TF card) reserved for events
Linked network camera capacity	16
Linked indoor extensions capacity	16
Notice capacity	200
Linked doorphone capacity	17 IP doorphones Max.
Network parameters	
Communication protocol	TCP/IP, SIP, RTSP
Wired network	10/100 Mbps self-adaptive through 2-wire interface
Wi-Fi standard	Wi-Fi 802.11 b/g/n
Bluetooth version	/
3G/4G standard	/
3G/4G standard	/
Zigbee	/
Zigbee	/
Device interfaces	
Alarm input	8-ch alarm inputs
TAMPER	/
RS-485	1

USB	/
TF card	Max to 128 G, SD 2.0 or lower version
Alarm output	2 relays (30 V Max.)
Two-wire IP interface	1
<b>General</b>	
Button	0
Installation	Surface mounting
Indicator	0
Weight	327 g
Protective level	/
Power supply method	Two-wire
Working temperature	-10 °C to 50 °C (14 °F to 122 °F)
Working humidity	10% to 90% (no-condensing)
Dimensions	200 mm × 140 mm × 23.6 mm (7.87" × 5.51" × 0.93")
Battery	/
Power supply	Powered by KAD704Y or KAD706Y series distributor
Application environment	Indoor
Power consumption	≤ 4 W
Language	English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese (Brazil), Spanish, Hebrew, Romanian, Turkish, Estonian, Danish, Swedish, Norwegian, Finnish, Vietnamese, Croatian, Slovenian, Serbian, Arabic, Portuguese (Portugal), Lithuanian, Uzbek, Kazakh, Mongolian, Ukrainian

## Physical Interface


No.	Description	No.	Description
1	Screen	5	Loudspeaker
2	Microphone	6	TF Card Slot
3	Debugging Port	7	Alarm Terminal
4	Network Interface and power supply	8	Reserved

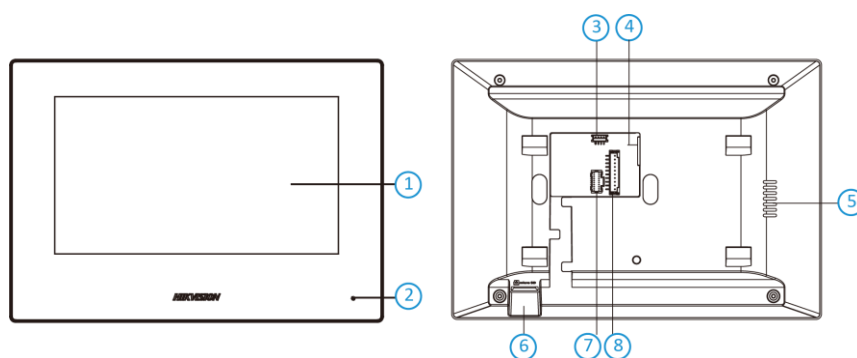

## Available Model





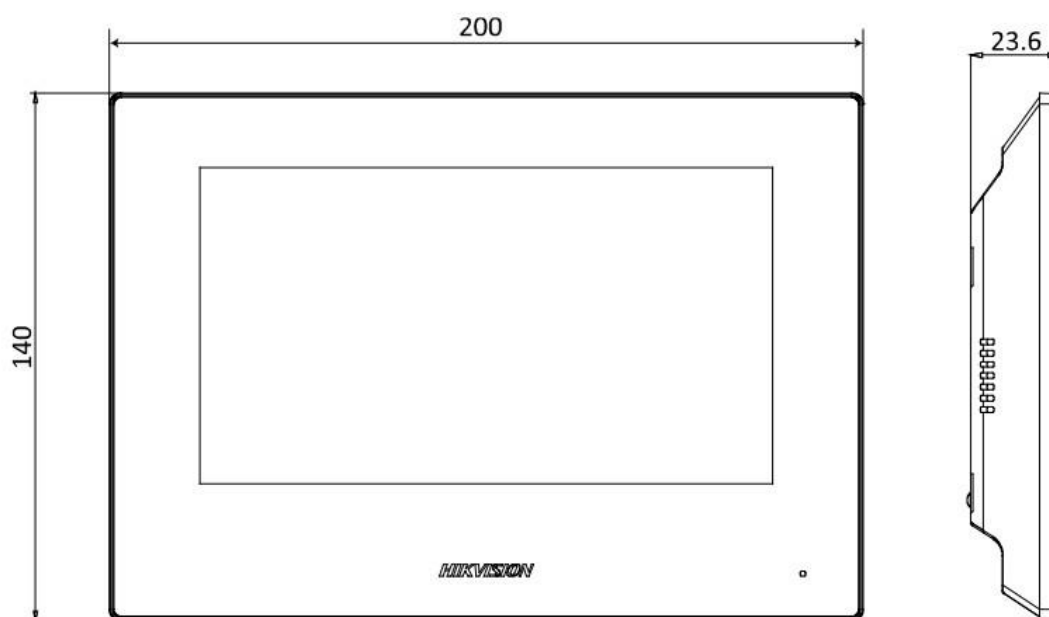





DS-KH6320EY-WTE2

▪ **Dimension**




▪ **Accessory**

▪ **Optional**

DS-KABH6320-T Indoor Station Table Bracket	DS-KIS702 Villa Two Wire Kit	DS-KIS702-P Two Wire IP Bundle	DS-KIS702Y	DS- KIS702/S#Europe
				
DS- KIS702/S#EUROPE	DS-KIS702EY	DS-KIS702Y#EU	DS-KIS7021Y-S#EU	DS-KIS7022Y-S#EU
				
DS-KIS7023Y-S#EU	DS-KIS7024Y-S#EU	DS-KIS7021Y-G#EU	DS-KIS7022Y-G#EU	DS-KIS7023Y-G#EU



**DS-KIS7024Y-G#EU**



**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com



Follow us on social media to get the latest product and solution information.

